


Remove Wave IP 2500 ISC tray

Last Modified on 09/30/2015 1:19 pm EDT

These instructions cover safely removing the ISC (Integrated Services Card) from a Wave IP 2500. This should only be done by a certified Wave technician.

1. Shutdown the Wave properly (either from Global Administrator, or by pressing and holding the red Shutdown button on the front of the Wave).
2. Take note of the all cables and connectors plugged in to the front of the ISC. Disconnect them.
3. Unplug the power cord, but leave the system grounded.
4. Using a small Phillips screwdriver, unscrew the right-side screw on the ISC. The screw will not come out. It will just become loose.

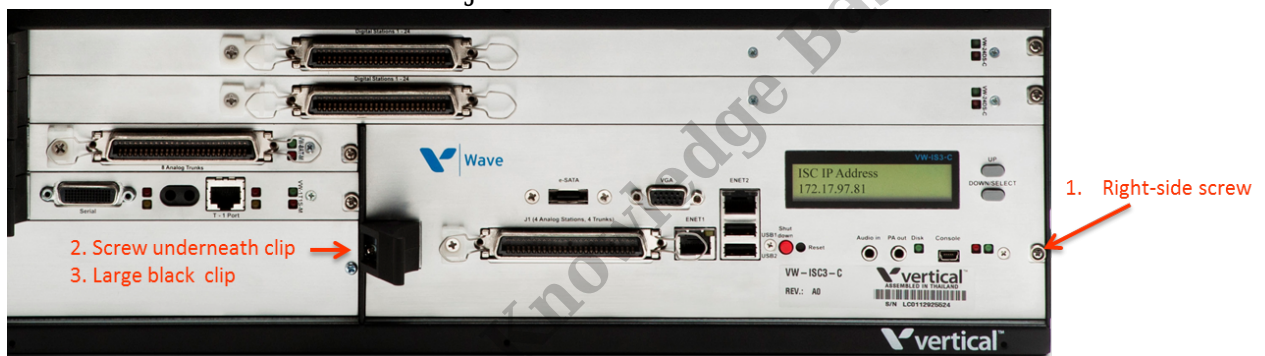

5. Underneath the clip on the left-side of the ISC is another screw. Unscrew it as well. Once again the screw will not come out. It will just become loose.
6. Push the black clip on the ISC to the left and the ISC will pop slightly out of its' slot.
7. Pull the ISC straight out using the black clip.

The ISC will pull out free from the ISC.

RELATED ARTICLES [template("related")]